



Want to see what we're up to?  
Check us out [@duraseinsolidsurface](#)  
or [durasein.com/us](#)

**Durasein**  
Profile Bits for  
Undermount Bowls



# Durasein

## Fabrication and Installation

### Profile Bits for Durasein Undermount Bowls

BULLETIN NO.  
Profile Bits\_0525

TECH INFO  
Profile Bits

#### Introduction

In this bulletin, methods are provided for creating profiles for Durasein® Solid Surface seamed undermount sinks and lavatories.

#### Importance of the Draft Angle

A draft angle is a slight taper usually applied to the vertical walls of a mold. Instead of being perfectly straight, the walls are angled slightly outward from the base to the top. This slight taper ensures that the cast sink can be easily removed from the mold without damage. Without an adequate draft, the solidified part would bind or stick to the mold due to friction or shrinkage.


The draft angle creates a gentle slope on the sidewalls, front and rear of the sink. A small draft angle creates a slope which is almost perpendicular to the countertop. A larger draft angle can make the sink sides appear more sloped.

Based mostly on design considerations, the draft angles on bowls can vary, usually ranging from between 2° to 20°. Generally vanity bowls will tend to have a range of draft angles due to aesthetic and water flow considerations. Kitchen sinks tend to have smaller draft angles.

A kitchen sink might typically have a small draft angle.



A vanity sink may typically have a larger draft angle.

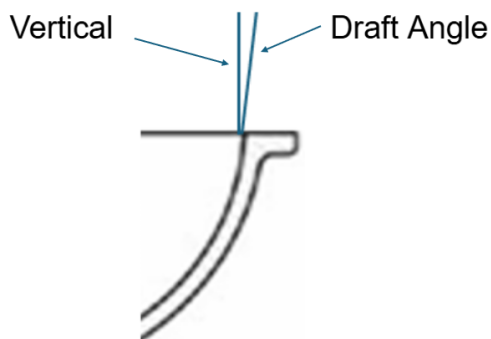



# Durasein

## Fabrication and Installation

### Profile Bits for Durasein Undermount Bowls

BULLETIN NO.  
Profile Bits\_0525

TECH INFO  
Profile Bits

The following is a chart showing the draft angles for Durasein sinks:

|              |         |                                                                                     | SINK DRAFT ANGLES |       |      |
|--------------|---------|-------------------------------------------------------------------------------------|-------------------|-------|------|
| MODEL NUMBER |         |                                                                                     | SIDES             | FRONT | REAR |
| DLB 401A     | Ansel   |    | 12°               | 7.5°  | 7.5° |
| DLB 402      | Ansel   |   | 12°               | 7.5°  | 7.5° |
| DLA359       | Frida   |  | 17°               | 6.5°  | 4.5° |
| DLA 104A     | Frida   |  | 18°               | 5°    | 10°  |
| DLA 354      | Euro    |  | 7°                | 6°    | 4°   |
| DLA 360A     | Euro    |  | 9°                | 8°    | 5°   |
| DLD 125      | Vincent |  | 7°                | 7°    | 7°   |
| DLD 202      | Henri   |  | 5°                | 5°    | 5°   |
| DLB 379A     | Andy    |  | 4°                | 4°    | 4°   |
| DLB 411      | Andy    |  | 4°                | 4°    | 4°   |

### Bowl profiling bits

Generally, two types of router bits are used after an undermount bowl is seamed to the sheet.

The first bit is used to cut the sheet away from the undermounted bowl.

The bit is typically a 3/8" or 1/2" straight cut bit with an oversized bearing.



The second is a bit that cuts a bevel and roundover. The bevel angle can vary and is usually about 3° larger than the draft angle of the bowl.



To begin with the routing process, turn the top over and drill a pilot hole for the first bit. Cut the sheet material from the center of the bowl area with the flush-cut router bit with an oversized nylon bearing. Start from a pilot hole and rout clockwise around the bowl. Hold the cutout steady as it separates from the top to avoid damage to the edge. Then select the desired bowl profile bit and rout clockwise around the bowl.



# Durasein


## Fabrication and Installation

### Profile Bits for Durasein Undermount Bowls



BULLETIN NO.  
Profile Bits\_0525

TECH INFO  
Profile Bits

The first cut leaves a small amount of overhang that will be removed by the profile bit.




The second cut is using the profile bit which slightly trims the top of the bowl and cuts the seam area and edge of the top with both an angle and a roundover.



Flush Cut with Oversized Bearing



Flush Cut showing Overhang



Profile Bit Cut

The progression results in a smooth transition from the sink to the top. The most common bit profile is a roundover, usually with either a  $\frac{3}{8}$ " or  $\frac{1}{2}$ " radius curve. Some bit manufacturers provide OG profiles. Depending on the selected bit, the angle portion of the bit will usually be a few degrees more than the draft angle of the bowl.

### Selecting the bits

The bits are basically selected keeping in mind the draft angles of the bowl. Manufacturers have a limited number of options.

Here is a sample chart showing one manufacturer's suggested bits for a roundover profile on Durasein sinks:

| MODEL NUMBER | SINK DRAFT ANGLES |       |      | VELEPEC |           |
|--------------|-------------------|-------|------|---------|-----------|
|              | SIDES             | FRONT | REAR | BIT #   | BIT ANGLE |
| DLB 401A     | 12°               | 7.5°  | 7.5° | 30-140  | 20°       |
| DLB 402      | 12°               | 7.5°  | 7.5° | 30-140  | 20°       |
| DLA359       | 17°               | 6.5°  | 4.5° | 30-140  | 20°       |
| DLA 104A     | 18°               | 5°    | 10°  | 30-140  | 20°       |
| DLA 354      | 7°                | 6°    | 4°   | 30-157  | 15°       |
| DLA 360A     | 9°                | 8°    | 5°   | 30-157  | 15°       |
| DLD 125      | 7°                | 7°    | 7°   | 30-155  | 10°       |
| DLD 202      | 5°                | 5°    | 5°   | 30-155  | 10°       |
| DLB 379A     | 4°                | 4°    | 4°   | 30-155  | 10°       |
| DLB 411      | 4°                | 4°    | 4°   | 30-155  | 10°       |

Note that the angles on the suggested bits are slightly larger than the draft angles on the various bowls. As the angle on the bit gets larger the result is a wider flair of the upper finished edge of the bowl. When choosing a bit for this process, try to use a bit that is only slightly larger than the draft angle on the bowl. Particularly for vanity bowls, there is a wider variation in the draft angle at the bowl edge so a proper bit is generally selected based on the largest draft angle in the bowl.



# Durasein


## Fabrication and Installation

### Profile Bits for Durasein Undermount Bowls


BULLETIN NO.  
Profile Bits\_0525

TECH INFO  
Profile Bits

There may be some cases, particularly in bowls with small draft angles, that a slightly different approach might be selected. This process uses a straight bevel bit followed by a roundover bit.



BEVEL BIT



ROUND OVER BIT

Regardless of the method used, the tooling should be field tested and approved by the fabricator prior to actual use. Regular metal bearings for router bits can create issues, so be sure to select bits that are designed for use on solid surfacing and are outfitted with bearing guides that will not scratch the material.

Referenced Documents: Approved Solvents for Surface Preparation of Durasein® Solid Surface During Fabrication

Durasein reserves the right to make changes to this information and to this disclaimer. This information provided by Durasein is based on technical data and experience with Durasein® Solid Surface products and is intended for use by persons having technical skill and at their own risk and discretion. Durasein does not warrant this information is absolutely current and accurate and assumes no liability for accuracy, completeness, or usefulness of any information. No representation or warranties, express or implied with respect to this information, including any warranties of title, non-infringement of copyright or patent rights of others, merchantability, or fitness or suitability for any purpose are made by Durasein as conditions of use are not within the control of Durasein. This information should not be relied upon for creating specifications, designs, or installation guidelines. The persons responsible for use and handling of products are responsible for ensuring the design, fabrication, or installation methods present no safety or health hazards. Durasein does not have liability and assumes no liability for the use of results obtained from such information, whether or not information is based on negligence by Durasein. Durasein shall not be liable for (i) any damages, including claims relating to the specification, design, fabrication, installation, or combination of this product with any other product(s), and (ii) special, direct, indirect, or consequential damages. Nothing herein is to be taken as a license to infringe or a recommendation to operate under any patents. Use or access of this information shall be deemed your acceptance of this disclaimer and any changes.

Copyright © 2025 Durasein. Durasein® is a registered trademark of Relang International LLC and its affiliates. All rights reserved.

Want to see what we're up to?  
Check us out @duraseinsolidsurface  
or durasein.com/us

info@durasein.com